

# ZENSTAR

Quality Tooling Redefined



















CATALOGUE - 2023

## CARBIDE TIPPED BRAZED TOOLS



# STANDARD BRAZED TOOLS FOR EXPORT ANSI B94.5-1974



AVAILABILITY CHART			
SIZE	RIGHT HAND	LEFT HAND	NEUTRAL
ISO 1	✓	✓	
ISO 2	✓	✓	
ISO 3	✓	✓	
ISO 4			✓
ISO 5	✓	✓	
ISO 6	✓	✓	
ISO 7	✓	✓	
ISO 8	✓	✓	
ISO 9	✓	✓	
113			✓
115	✓	✓	




AVAILABILITY CHART			
SIZE	RIGHT HAND	LEFT HAND	NEUTRAL
116	✓	✓	
122			✓
140	✓	✓	
141	✓	✓	
142	✓	✓	
163			✓
165	✓	✓	
166	✓	✓	
IND 2	✓	✓	
V PROFILE			✓

**NOTES**

- WE ALSO MANUFACTURE SPECIAL PRODUCTS AS PER YOUR REQUIREMENTS & DRAWINGS
- ANY PRODUCT DIMENSIONAL VARIABILITY MAY OCCUR DUE TO VARIATION IN RAW MATERIAL


**ISO 1** STRAIGHT TURNING TOOL

**ISO 2** CRANKED TURNING & FACING TOOL

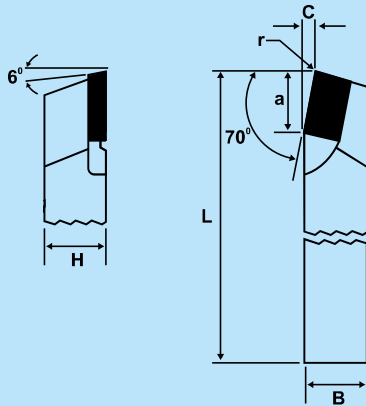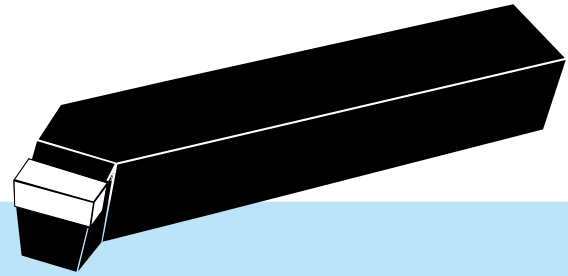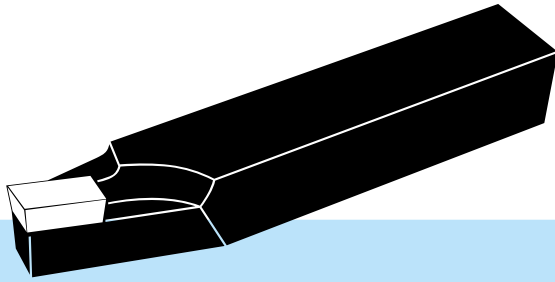



**ISO1**

Right Hand Style.

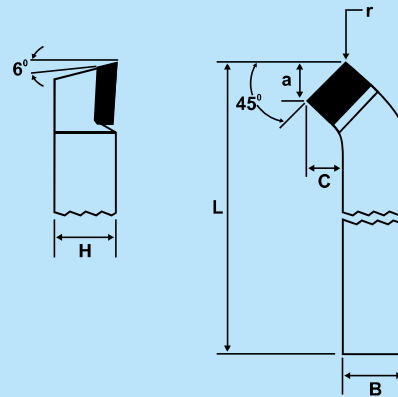




**ISO2**

Right Hand Style.

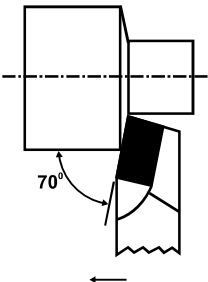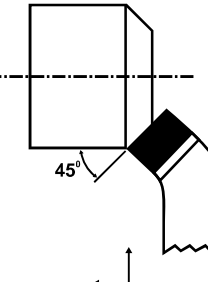Entering angle Feed Direction	Tool Code	Dimensions in mm						Tip
		Height	Breadth	Length	Crank	a	Radius	
<b>70°</b>  Rake angle : 10° Angle of inclination 4°	ISO 1 RH/LH 1010	10	10	90	4	7.5	0.4	C8
	ISO 1 RH/LH 1212	12	12	100	5	9.4	0.4	C10
	ISO 1 RH/LH 1616	16	16	110	6	11.2	0.4	C12
	ISO 1 RH/LH 2020	20	20	125	8	15.0	0.8	C16
	ISO 1 RH/LH 2525	25	25	140	10	18.8	1.2	C20
	ISO 1 RH/LH 3232	32	32	170	12	23.5	1.2	C25
	ISO 1 RH/LH 4040	40	40	200	16	30.0	1.6	C32
	ISO 1 RH/LH 1610	16	10	110	4	9.4	0.4	C10
	ISO 1 RH/LH 2012	20	12	125	5	11.2	0.4	C12
	ISO 1 RH/LH 2516	25	16	140	6	15.0	0.8	C16
	ISO 1 RH/LH 3220	32	20	170	8	18.8	1.2	C20
	ISO 1 RH/LH 4025	40	25	200	10	23.5	1.2	C25
ISO 1 RH/LH 5032	50	32	240	12	30.0	1.6	C32	
<b>45°</b>  Rake angle : 10° Angle of inclination 0°	ISO 2 RH/LH 1010	10	10	90	6	5.6	0.4	C8
	ISO 2 RH/LH 1212	12	12	100	7	7.0	0.4	C10
	ISO 2 RH/LH 1616	16	16	110	8	8.5	0.4	C12
	ISO 2 RH/LH 2020	20	20	125	10	11.3	0.8	C16
	ISO 2 RH/LH 2525	25	25	140	12	14.1	1.2	C20
	ISO 2 RH/LH 3232	32	32	170	14	17.6	1.2	C25
	ISO 2 RH/LH 4040	40	40	200	18	22.6	1.6	C32
	ISO 2 RH/LH 1610	16	10	110	7	7.0	0.4	C10
	ISO 2 RH/LH 2012	20	12	125	8	8.5	0.4	C12
	ISO 2 RH/LH 2516	25	16	140	10	11.3	0.8	C16
	ISO 2 RH/LH 3220	32	20	170	12	14.1	1.2	C20
	ISO 2 RH/LH 4025	40	25	200	14	17.6	1.2	C25
ISO 2 RH/LH 5032	50	32	240	18	22.6	1.6	C32	

**ISO 3** CRANKED TURNING AND FACING TOOL

**ISO 4** RECESSING TOOL

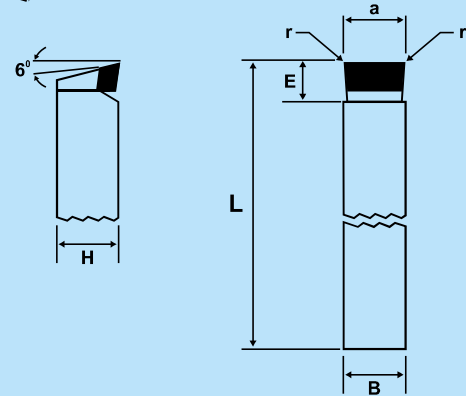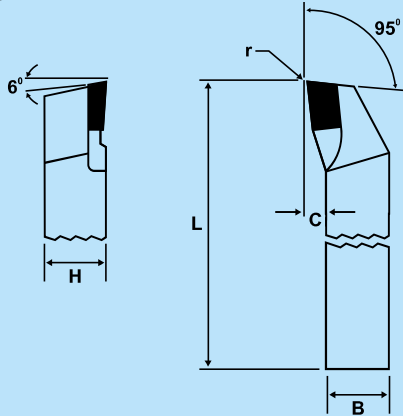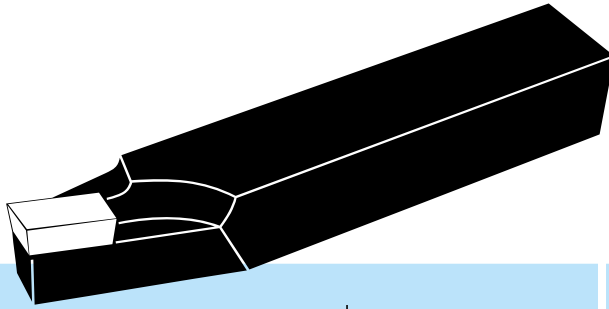

**ISO3**




Right Hand Style.

**ISO4**

Entering angle Feed Direction	Tool Code	Dimensions in mm							Tip
		Height	Breadth	Length	Crank	E	a	Radius	
<p>95° Rake angle : 10° Angle of inclination 0°</p>	ISO 3 RH/ LH 1010	10	10	90	5	---	---	0.4	C8
	ISO 3 RH/ LH 1212	12	12	100	6	---	---	0.4	C10
	ISO 3 RH/ LH 1616	16	16	110	8	---	---	0.4	C12
	ISO 3 RH/ LH 2020	20	20	125	10	---	---	0.8	C16
	ISO 3 RH/ LH 2525	25	25	140	12	---	---	1.2	C20
	ISO 3 RH/ LH 3232	32	32	170	14	---	---	1.2	C25
	ISO 3 RH/ LH 4040	40	40	200	20	---	---	1.6	C32
	ISO 3 RH/ LH 1610	16	10	110	5	---	---	0.4	C10
	ISO 3 RH/ LH 2012	20	12	125	6	---	---	0.4	C12
	ISO 3 RH/ LH 2516	25	16	140	8	---	---	0.4	C16
	ISO 3 RH/ LH 3220	32	20	170	10	---	---	0.8	C20
	ISO 3 RH/ LH 4025	40	25	200	12	---	---	1.2	C25
ISO 3 RH/ LH 5032	50	32	240	14	---	---	1.2	C32	
<p>95° Rake angle : 10° Angle of inclination 0°</p>	ISO 4 1010	10	10	90	---	10	10	0.4	C10
	ISO 4 1212	12	12	100	---	12	12	0.4	C12
	ISO 4 1616	16	16	110	---	16	16	0.8	C16
	ISO 4 2020	20	20	125	---	20	20	1.2	C20
	ISO 4 2525	25	25	140	---	25	25	1.2	C25
	ISO 4 3232	32	32	170	---	32	32	1.6	C32
	ISO 4 4040	40	40	200	---	40	40	2.0	C40
	ISO 4 1610	16	10	110	---	16	10	0.4	C10
	ISO 4 2012	20	12	125	---	20	12	0.4	C12
	ISO 4 2516	25	16	140	---	25	16	0.8	C16
	ISO 4 3220	32	20	170	---	32	20	1.2	C20
	ISO 4 4025	40	25	200	---	40	25	1.2	C25
ISO 4 5032	50	32	240	---	50	32	1.6	C32	

**ISO 5** CRANKED FACING TOOL

**ISO 6** CRANKED KNIFE TOOL

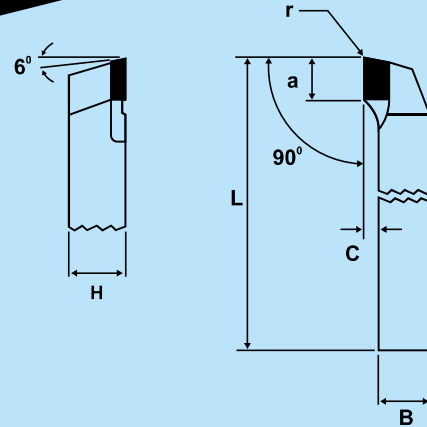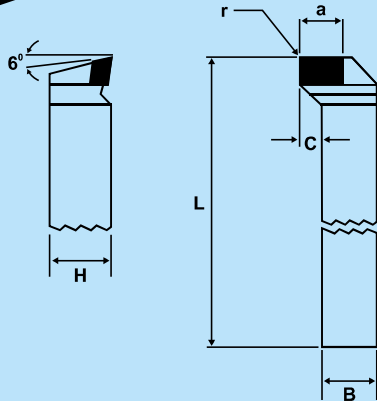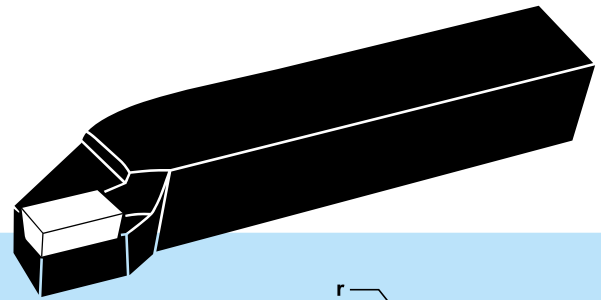

**ISO5**

**ISO6**


Right Hand Style.

Right Hand Style.

Entering angle Feed Direction	Tool Code	Dimensions in mm						Tip
		Height	Breadth	Length	Crank	a	Radius	
<p><b>90°</b></p> <p>Rake angle : 10° Angle of inclination 0°</p>	ISO 5 RH / LH 1010	10	10	90	5	8	0.4	C8
	ISO 5 RH / LH 1212	12	12	100	6	10	0.4	C10
	ISO 5 RH / LH 1616	16	16	110	8	12	0.4	C12
	ISO 5 RH / LH 2020	20	20	125	10	16	0.8	C16
	ISO 5 RH / LH 2525	25	25	140	12	20	1.2	C20
	ISO 5 RH / LH 3232	32	32	170	16	25	1.2	C25
	ISO 5 RH / LH 4040	40	40	200	20	32	1.6	C32
	ISO 5 RH / LH 1610	16	10	110	6	10	0.4	C10
	ISO 5 RH / LH 2012	20	12	125	8	12	0.4	C12
	ISO 5 RH / LH 2516	25	16	140	10	16	0.8	C16
	ISO 5 RH / LH 3220	32	20	170	12	20	1.2	C20
ISO 5 RH / LH 4025	40	25	200	16	25	1.2	C25	
ISO 5 RH / LH 5032	50	32	240	20	32	1.6	C32	
<p><b>90°</b></p> <p>Rake angle : 10° Angle of inclination 0°</p>	ISO 6 RH / LH 1010	10	10	90	4	8	0.4	C8
	ISO 6 RH / LH 1212	12	12	100	5	10	0.4	C10
	ISO 6 RH / LH 1616	16	16	110	6	12	0.4	C12
	ISO 6 RH / LH 2020	20	20	125	8	16	0.8	C16
	ISO 6 RH / LH 2525	25	25	140	10	20	1.2	C20
	ISO 6 RH / LH 3232	32	32	170	12	25	1.2	C25
	ISO 6 RH / LH 4040	40	40	200	14	32	1.6	C32
	ISO 6 RH / LH 1610	16	10	110	5	10	0.4	C10
	ISO 6 RH / LH 2012	20	12	125	6	12	0.4	C12
	ISO 6 RH / LH 2516	25	16	140	8	12	0.8	C16
	ISO 6 RH / LH 3220	32	20	170	10	20	1.2	C20
	ISO 6 RH / LH 4025	40	25	200	12	25	1.2	C25
	ISO 6 RH / LH 5032	50	32	240	14	32	1.6	C32


**ISO 7 PARTING TOOL**

**620 SCRAPER**

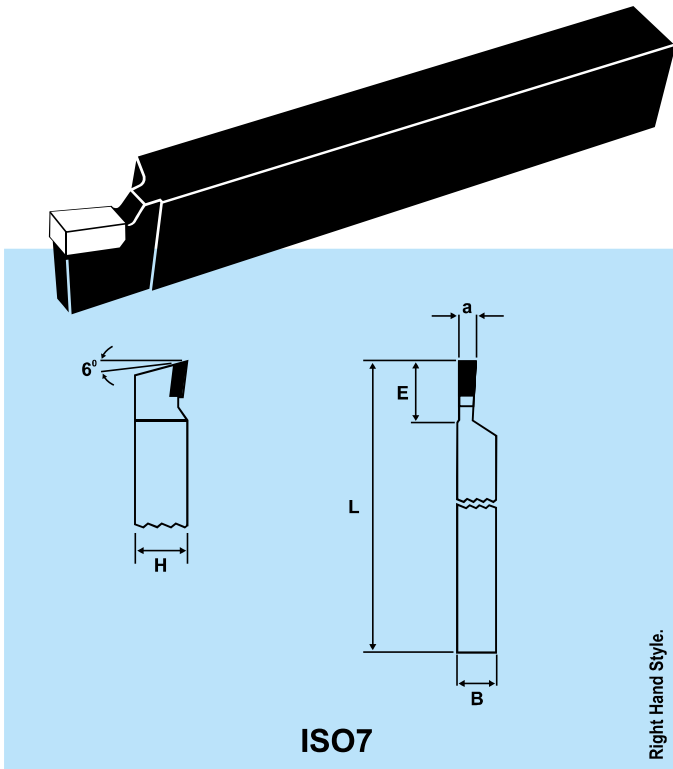

**ISO 7**

Right Hand Style.

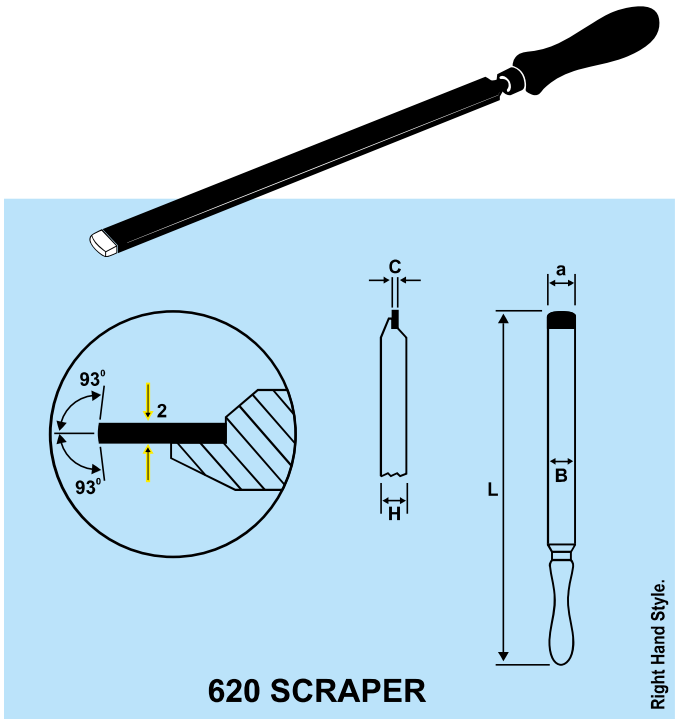

**620 SCRAPER**

Right Hand Style.




Entering angle Feed Direction	Tool Code	Dimensions in mm					Tip
		Height	Breadth	Length	E	a	
<p>Rake angle : 10° Angle of inclination 0°</p>	ISO 7 RH /LH 1006	10	06	90	12	3	D3
	ISO 7 RH /LH 1208	12	08	100	12	3	D3
	ISO 7 RH /LH 1610	16	10	110	14	4	D4
	ISO 7 RH /LH 2012	20	12	125	16	5	D5
	ISO 7 RH /LH 2516	25	16	140	20	6	D6
	ISO 7 RH /LH 3220	32	20	170	25	8	D8
	ISO 7 RH /LH 4025	40	25	200	32	10	D10
	ISO 7 RH /LH 5032	50	32	240	40	12	D12

Tool Code	Dimensions in mm						Tip
	Height	Breadth	Length	Crank	a	Radius	
620-1315	4.5	15	320	2	15	200	AC15
620-1320	5	20	360	2	20	200	AC20
620-1325	5	25	400	2	25	300	AC25
620-1330	5	30	465	2	30	300	AC30

*Precision beats power*

**ISO 8 BORING TOOL**

**ISO 9 BORING AND FACING TOOL**

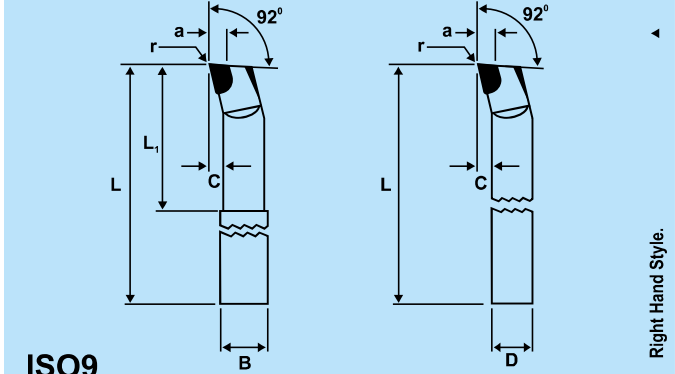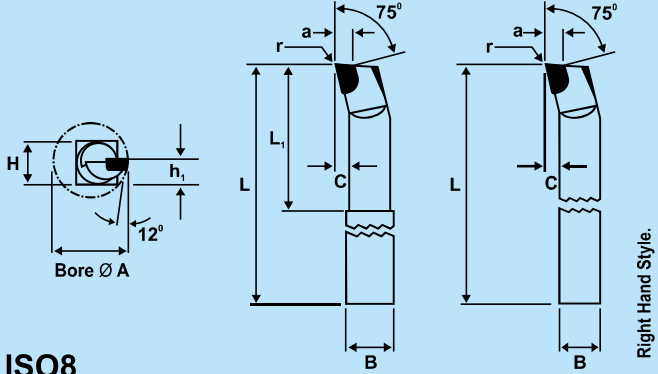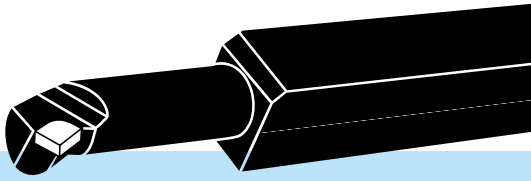



**ISO8**

**ISO9**


Entering angle Feed Direction	Tool Code	Dimensions in mm							Tip
		H/B/D	Height	Length	Length <sub>1</sub>	a	r	Ø A min	
<b>75°</b>  Rake angle : 10° Angle of inclination 0°	ISO8 RH 0808	8	5.9	125	40	3.8	0.4	14	A6
	ISO8 RH 1010	10	7.5	150	50	3.8	0.4	18	A6
	ISO8 RH 1212	12	9.1	180	63	4.8	0.4	21	A8
	ISO8 RH 1616	16	12.3	210	80	5.8	0.4	27	A10
	ISO8 RH 2020	20	15.5	250	100	7.7	0.8	34	A12
	ISO8 RH 2525	25	19.5	300	125	9.6	0.8	43	A16
	ISO8 RH 3232	32	25.1	355	160	11.6	0.4	52	A20
	ISO8 RH 08	8	5.9	125	----	3.8	0.4	14	A6
	ISO8 RH 10	10	7.5	150	----	3.8	0.4	18	A6
	ISO8 RH 12	12	9.1	180	----	4.8	0.4	21	A8
	ISO8 RH 16	16	12.3	210	----	5.8	0.4	27	A10
	ISO8 RH 20	20	15.5	250	----	7.7	0.8	34	A12
	ISO8 RH 25	25	19.5	300	----	9.6	0.8	43	A16
ISO8 RH 32	32	25.1	355	----	11.6	0.4	52	A20	
<b>92°</b>  Rake angle : 10° Angle of inclination 0°	ISO9 RH 0808	8	5.9	125	40	3.5	0.4	14	A6
	ISO9 RH 1010	10	7.5	150	50	3.5	0.4	18	A6
	ISO9 RH 1212	12	9.1	180	63	4.4	0.4	21	A8
	ISO9 RH 1616	16	12.3	210	80	5.3	0.4	27	A10
	ISO9 RH 2020	20	15.5	250	100	7.1	0.8	34	A12
	ISO9 RH 2525	25	19.5	300	125	8.9	0.8	43	A16
	ISO9 RH 3232	32	25.1	355	160	10.7	0.4	52	A20
	ISO9 RH 8	8	5.9	125	----	3.5	0.4	14	A6
	ISO9 RH 10	10	7.5	150	----	3.5	0.4	18	A6
	ISO9 RH 12	12	9.1	180	----	4.4	0.4	21	A8
	ISO9 RH 16	16	12.3	210	----	5.3	0.4	27	A10
	ISO9 RH 20	20	15.5	250	----	7.1	0.4	34	A12
	ISO9 RH 25	25	19.5	300	----	8.9	0.8	43	A16
ISO9 RH 32	32	25.1	355	----	10.7	0.8	52	A20	

**113** STRAIGHT, ROUND NOSE TURNING TOOL

**115** CRANKED, ROUND NOSE TURNING TOOL

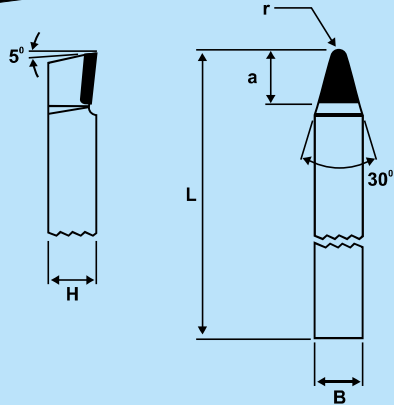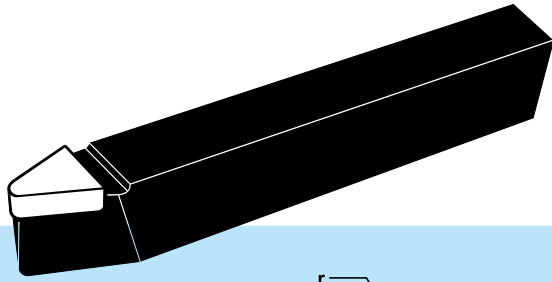

**No.113**

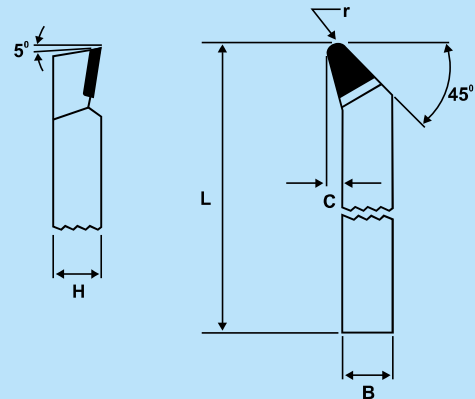



**No.115**

Right Hand Style.

Entering angle Feed Direction	Tool Code	Dimensions in mm						Tip
		Height	Breadth	Length	Crank	a	Radius	
<p>Rake angle : 5° Angle of inclination 0°</p>	113 - 1010	10	10	90	---	12	1.0	G8
	113 - 1212	12	12	100	---	14	1.5	G10
	113 - 1616	16	16	110	---	17	2.5	G12
	113 - 2020	20	20	125	---	20	3.5	G16
	113 - 2525	25	25	140	---	23	4.5	G20
	113 - 3232	32	32	170	---	27	6.0	G25
	113 - 4040	40	40	200	---	32	8.0	G30
	113 - 1610	16	10	110	---	12	1.0	G8
	113 - 2012	20	12	125	---	14	1.5	G10
	113 - 2516	25	16	140	---	17	2.5	G12
	113 - 3220	32	20	170	---	20	3.5	G16
113 - 4025	40	25	200	---	23	4.5	G20	
113 - 5032	50	32	240	---	27	6.0	G25	
<p>Rake angle : 5° Angle of inclination 0°</p>	RH/LH 115 - 1010	10	10	90	3.0	---	1.0	G8
	RH/LH 115 - 1212	12	12	100	3.5	---	1.5	G10
	RH/LH 115 - 1616	16	16	110	4.5	---	2.5	G12
	RH/LH 115 - 2020	20	20	125	4.8	---	3.5	G16
	RH/LH 115 - 2525	25	25	140	5.5	---	4.5	G20
	RH/LH 115 - 3232	32	32	170	6.3	---	6.0	G25
	RH/LH 115 - 4040	40	40	200	7.0	---	8.0	G30
	RH/LH 115 - 1610	16	10	110	3.0	---	1.0	G8
	RH/LH 115 - 2012	20	12	125	3.5	---	1.5	G10
	RH/LH 115 - 2516	25	16	140	4.5	---	2.5	G12
	RH/LH 115 - 3220	32	20	170	4.8	---	3.5	G16
	RH/LH 115 - 4025	40	25	200	5.5	---	4.5	G20
	RH/LH 115 - 5032	50	32	240	6.3	---	6.0	G25




**116** BAR TURNING TOOL

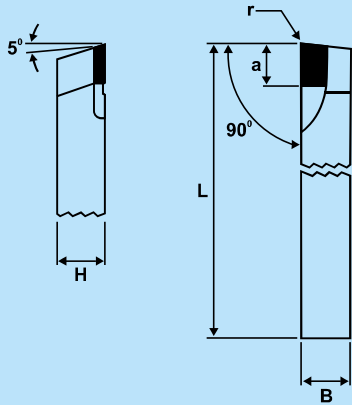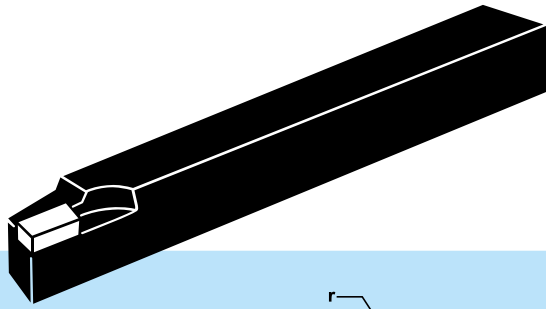

**No.116**

Right Hand Style.



**122** STRAIGHT FINISHING TOOL

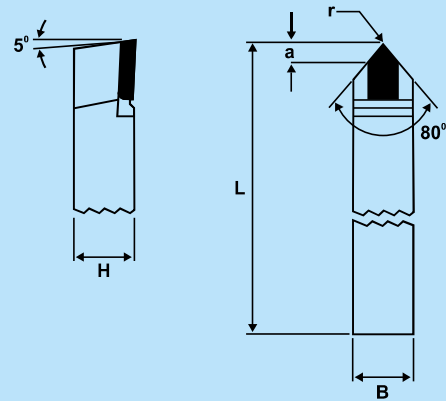

**No.122**

Entering angle Feed Direction	Tool Code	Dimensions in mm					Tip
		Height	Breadth	Length	a	Radius	
<p>Rake angle : 10° Angle of inclination 0°</p>	116 RH/LH - 1010	10	10	90	8	0.4	C8
	116 RH/LH - 1212	12	12	100	10	0.4	C10
	116 RH/LH - 1616	16	16	110	12	0.4	C12
	116 RH/LH - 2020	20	20	125	16	0.8	C16
	116 RH/LH - 2525	25	25	140	20	1.2	C20
	116 RH/LH - 3232	32	32	170	25	1.2	C25
	116 RH/LH - 4040	40	40	200	32	1.6	C32
	116 RH/LH - 1610	16	10	110	10	0.4	C10
	116 RH/LH - 2012	20	12	125	12	0.4	C12
	116 RH/LH - 2516	25	16	140	16	0.8	C16
	116 RH/LH - 3220	32	20	170	20	1.2	C20
<p>Rake angle : 10° Angle of inclination 0°</p>	116 RH/LH - 4025	40	25	200	25	1.2	C25
	116 RH/LH - 5032	50	32	240	32	1.6	C32
	122 - 1010	10	10	90	3.0	0.4	E5
	122 - 1212	12	12	100	3.6	0.4	E6
	122 - 1616	16	16	110	4.8	0.4	E8
	122 - 2020	20	20	125	6.0	0.8	E10
	122 - 2525	25	25	140	7.1	1.2	E12
	122 - 3232	32	32	170	9.5	1.2	E16
	122 - 4040	40	40	200	14.9	1.6	E25
	122 - 1610	16	10	110	3.6	0.4	E6
	122 - 2012	20	12	125	4.8	0.4	E8
122 - 2516	25	16	140	6.0	0.8	E10	
122 - 3220	32	20	170	7.1	1.2	E12	
122 - 4025	40	25	200	9.5	1.2	E16	
122 - 5032	50	32	240	11.9	1.6	E20	



**140** BORING TOOL NO. 140 (60°)

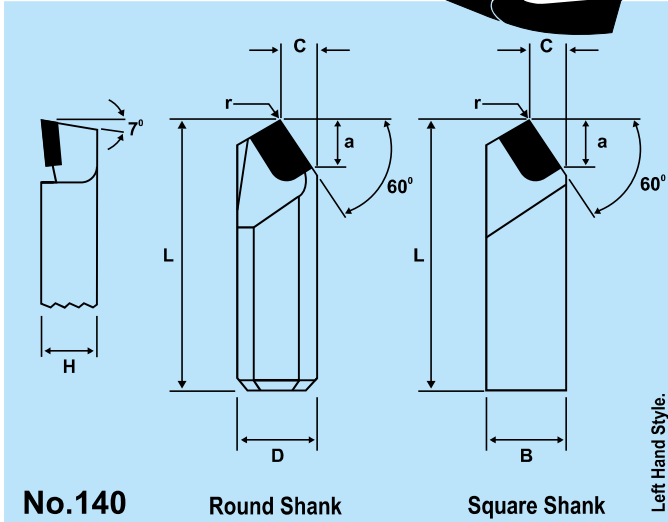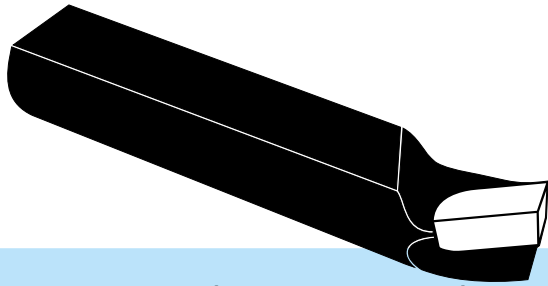

**No.140** Round Shank Square Shank

Left Hand Style.

**141** BORING TOOL NO. 141 (90°)

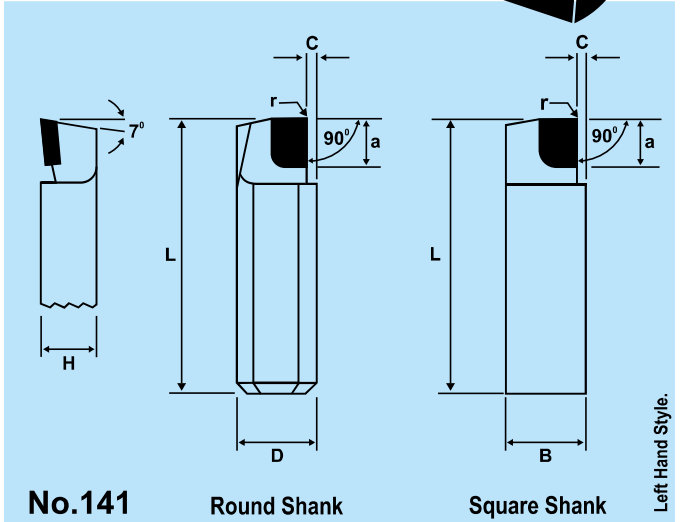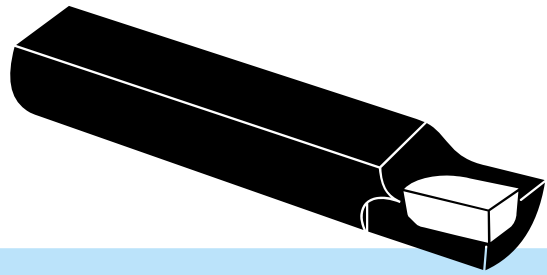

**No.141** Round Shank Square Shank




Left Hand Style.

Entering angle Feed Direction	Tool Code	Dimensions in mm						Tip RH/LH
		B/D	Breadth	Length	Crank	a	Radius	
<p>60°</p> <p>Angle of inclination 5°</p>	140 RH/LH - Ø 6	6	5.5	20	3.0	6.0	0.3	Solid
	140 RH/LH - Ø 8	8	7.0	24	3.7	6.0	0.3	Solid
	140 RH/LH - Ø 10	10	8.5	50	5.0	6.5	0.4	A8/B8
	140 RH/LH - Ø 12	12	10.5	60	6.0	8.5	0.4	A10/B10
	140 RH/LH - Ø 16	16	14.0	90	8.0	10.0	0.8	A12/B12
	140 RH/LH - Ø 20	20	17.0	120	10.0	13.5	0.8	A16/B16
	140 RH/LH - Ø 25	25	22.0	175	12.5	16.5	0.8	A20/B20
	140 RH/LH - 0606	6	6.0	18	3.0	6.0	0.3	Solid
	140 RH/LH - 0808	8	8.0	24	3.5	6.0	0.3	Solid
	140 RH/LH - 1010	10	10.0	50	4.5	6.5	0.4	A8/B8
	140 RH/LH - 1212	12	12.0	60	5.5	8.5	0.4	A10/B10
	140 RH/LH - 1616	16	16.0	90	7.5	10.0	0.8	A12/B12
	140 RH/LH - 2020	20	20.0	120	9.5	13.5	0.8	A16/B16
	140 RH/LH - 2525	25	25.0	175	11.5	16.5	0.8	A20/B20


Entering angle Feed Direction	Tool Code	Dimensions in mm						Tip RH/LH
		B/D	Height	Length	Crank	a	Radius	
<p>90°</p> <p>Angle of inclination 5°</p>	141 RH/LH - Ø 6	6	5.5	20	1.2	6.0	0.3	Solid
	141 RH/LH - Ø 8	8	7.0	24	1.4	6.0	0.3	Solid
	141 RH/LH - Ø 10	10	8.5	50	0.4	8.0	0.4	A8/B8
	141 RH/LH - Ø 12	12	10.5	60	0.4	10.0	0.4	A10/B10
	141 RH/LH - Ø 16	16	14.0	90	0.4	12.0	0.8	A12/B12
	141 RH/LH - Ø 20	20	17.0	120	0.5	16.0	0.8	A16/B16
	141 RH/LH - Ø 25	25	22.0	175	0.5	20.0	0.8	A20/B20
	141 RH/LH - 0606	6	6.0	18	1.2	6.0	0.3	Solid
	141 RH/LH - 0808	8	8.0	24	1.4	6.0	0.3	Solid
	141 RH/LH - 1010	10	10.0	50	0.4	8.0	0.4	A8/B8
	141 RH/LH - 1212	12	12.0	60	0.4	10.0	0.4	A10/B10
	141 RH/LH - 1616	16	16.0	90	0.4	12.0	0.8	A12/B12
	141 RH/LH - 2020	20	20.0	120	0.5	16.0	0.8	A16/B16
	141 RH/LH - 2525	25	25.0	175	0.5	20.0	0.8	A20/B20

**142 BORING TOOL**

**IND 2 EXTERNAL THREADING TOOL**

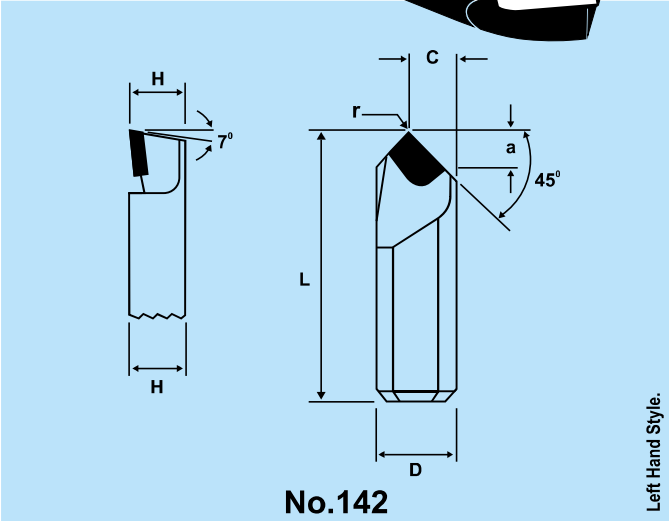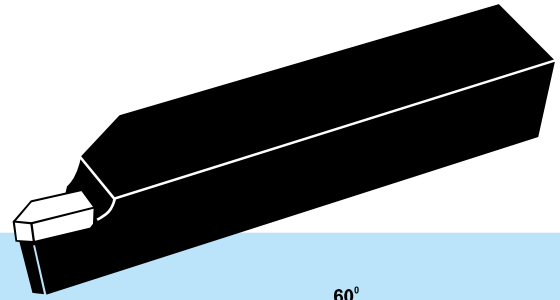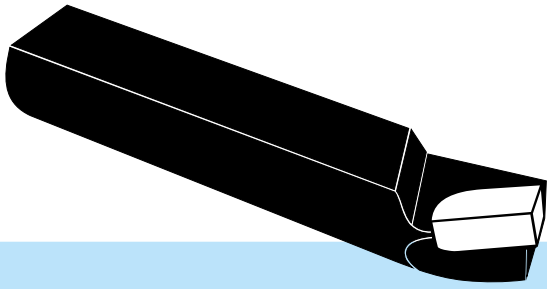

Left Hand Style.


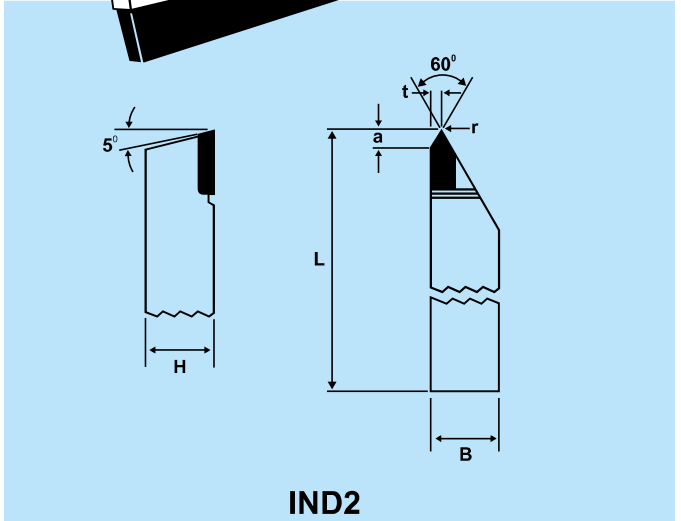


Entering angle Feed Direction	Tool Code	Dimensions in mm						Tip RH/LH
		B/D	Breadth	Length	Crank	a	Radius	
<p>45°</p> <p>Angle of inclination 5°</p>	142 RH/LH - 6	6	5.5	20	3.2	3.0	0.3	Solid
	142 RH/LH - 8	8	7.0	24	5.0	4.0	0.3	Solid
	142 RH/LH - 10	10	8.5	50	6.5	5.5	0.4	A8/B8
	142 RH/LH - 12	12	10.5	60	7.5	7.5	0.4	A10/B10
	142 RH/LH - 16	16	14.0	90	9.5	8.5	0.8	A12/B12
	142 RH/LH - 20	20	17.0	120	11.5	11.0	0.8	A16/B16
	142 RH/LH - 25	25	22.0	175	14.5	14.0	0.8	A20/B20
	142 RH/LH - 0606	6	6.0	18	3.2	3.0	0.3	Solid
	142 RH/LH - 0808	8	8.0	24	5.0	4.0	0.3	Solid
	142 RH/LH - 1010	10	10.0	50	6.5	5.5	0.4	A8/B8
	142 RH/LH - 1212	12	12.0	60	7.5	7.5	0.4	A10/B10
	142 RH/LH - 1616	16	16.0	90	9.5	8.5	0.8	A12/B12
	142 RH/LH - 2020	20	20.0	120	11.5	11.0	0.8	A16/B16
	142 RH/LH - 2525	25	25.0	175	14.5	14.0	0.8	A20/B20

Entering angle Feed Direction	Tool Code	Dimensions in mm									Tip
		H/B	Length	Length <sub>1</sub>	Height <sub>1</sub>	a	d	t	Radius	ØA min	
<p>Rake angle 0°</p> <p>Angle of inclination 0°</p>	IND2RH60°2020	20	125	---	---	4.3	---	2.5	0.1	---	FT18


**156** CRANKED INTERNAL RECESSING TOOL

**163** TURNING AND GROOVING TOOL

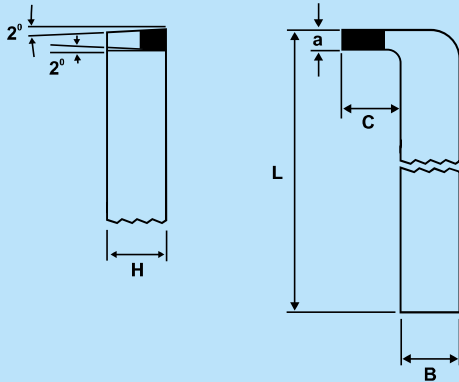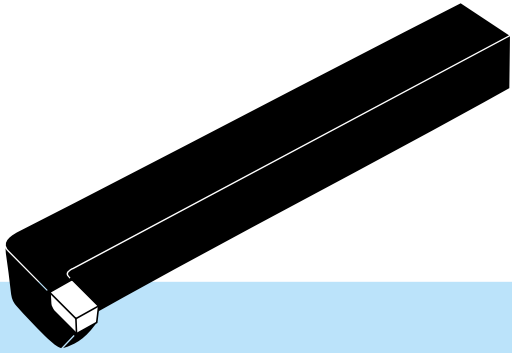

**No.156**



Right Hand Style.

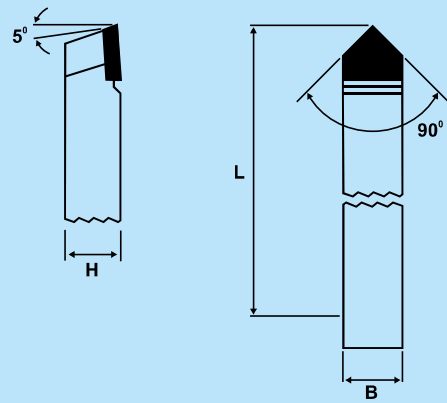

**No.163**



Entering angle Feed Direction	Tool Code	Dimensions in mm					Tip
		Height	Breadth	Length	Crank	a	
<p>Rake angle : 0° Angle of inclination 0°</p>	156 RH/LH - 1010	10	10	100	9.0	3	D3
	156 RH/LH - 1212	12	12	110	11.0	4	D4
	156 RH/LH - 1616	16	16	140	14.0	5	D5
	156 RH/LH - 2020	20	20	160	18.0	6	D6
	156 RH/LH - 2525	25	25	200	20.0	8	D8
	156 RH/LH - 3232	32	32	250	28.0	10	D10
	156 RH/LH - 4040	40	40	315	30.0	12	D12
<p>Rake angle : 0° Angle of inclination 0°</p>	163 - 1010	10	10	90	---	---	F10
	163 - 1212	12	12	100	---	---	F12
	163 - 1616	16	16	110	---	---	F16
	163 - 2020	20	20	125	---	---	F20
	163 - 2525	25	25	140	---	---	F25
	163 - 3232	32	32	170	---	---	F32
	163 - 4040	40	40	200	---	---	F40
	163 - 5050	50	50	240	---	---	F50
	163 - 1610	16	10	110	---	---	F10
	163 - 2012	20	12	125	---	---	F12
	163 - 2516	25	16	140	---	---	F16
	163 - 3220	32	20	170	---	---	F20
	163 - 4025	40	25	200	---	---	F25
	163 - 5032	50	32	240	---	---	F32

**164 PULLEY GROOVING TOOL**

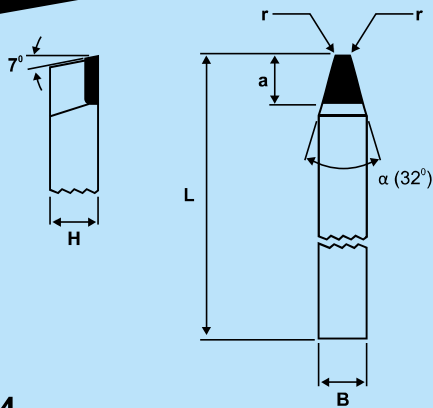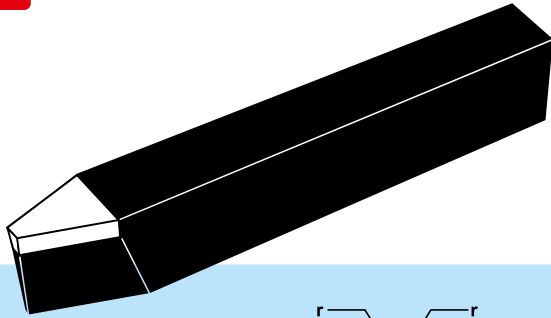

**No.164**



**165 EXTERNAL THREADING TOOL**

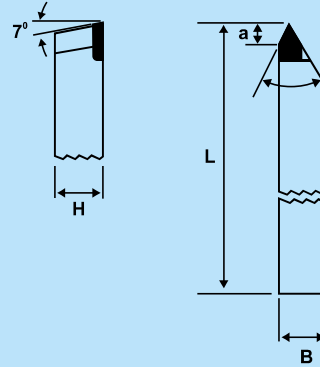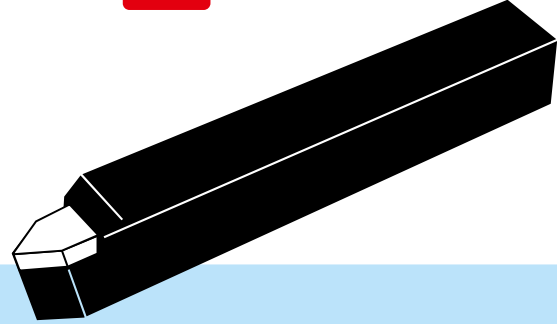

**No.165**



Entering angle Feed Direction	Tool Code	Dimensions in mm							
		Height	Breadth	Length	N.W.	$\alpha$	a	VEE Size	Tip
<p>Rake angle 10° Angle of inclination 0°</p>	164 - 1616	16	16	150	4.9	32°	18	A	CR 16
	164 - 1616	16	16	150	4.6	34°	18	A	CR 16
	164 - 1616	16	16	150	4.3	36°	18	A	CR 16
	164 - 1616	16	16	150	3.9	38°	18	A	CR 16
	164 - 2020	20	20	175	6.5	32°	22	B	CR 20
	164 - 2020	20	20	175	6.0	34°	22	B	CR 20
	164 - 2020	20	20	175	5.5	36°	22	B	CR 20
	164 - 2020	20	20	175	5.1	38°	22	B	CR 20
	164 - 2525	25	25	200	8.5	34°	30	C	CR 25
	164 - 2525	25	25	200	8.0	36°	30	C	CR 25
	164 - 2525	25	25	200	7.4	38°	30	C	CR 25
	164 - 2516	25	16	150	4.9	32°	18	A	CR 16
	164 - 2516	25	16	150	4.6	34°	18	A	CR 16
	164 - 2516	25	16	150	4.3	36°	18	A	CR 16
	164 - 2516	25	16	150	3.9	38°	18	A	CR 16
	164 - 3220	32	20	175	6.5	32°	22	B	CR 20
	164 - 3220	32	20	175	6.0	34°	22	B	CR 20
	164 - 3220	32	20	175	5.5	36°	22	B	CR 20
	164 - 3220	32	20	175	5.1	38°	22	B	CR 20
	164 - 4025	40	25	200	8.5	34°	30	C	CR 25
164 - 4025	40	25	200	8.0	36°	30	C	CR 25	
164 - 4025	40	25	200	7.4	38°	30	C	CR 25	
<p>Rake angle 0° Angle of inclination 0°</p>	165 - 1010	10	10	90	---	---	5	---	E4
	165 - 1212	12	12	100	---	---	6	---	E5
	165 - 1616	16	16	110	---	---	7	---	E6
	165 - 2020	20	20	125	---	---	8	---	E8
	165 - 2525	25	25	140	---	---	9	---	E10
	165 - 3232	32	32	170	---	---	10	---	E12
	165 - 4040	40	40	200	---	---	11	---	E16
	165 - 1610	16	10	110	---	---	6	---	E5
	165 - 2012	20	12	125	---	---	7	---	E6
	165 - 2516	25	16	140	---	---	8	---	E8
	165 - 3220	32	20	170	---	---	9	---	E10
	165 - 4025	40	25	200	---	---	10	---	E12

**166** INTERNAL THREADING TOOL WITH V PROFILE

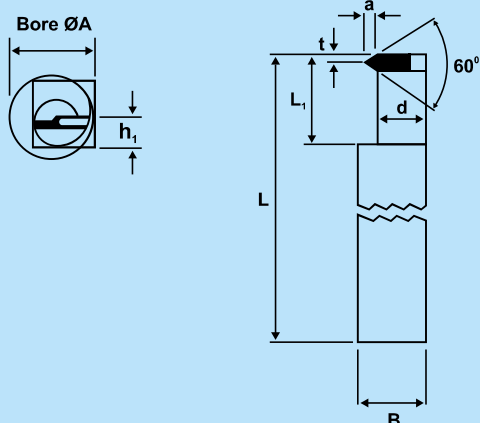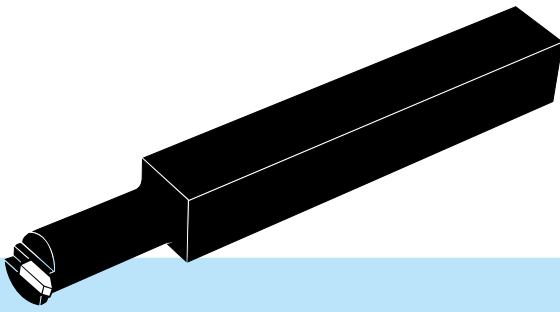

**No.166**

**166** INTERNAL THREADING TOOL

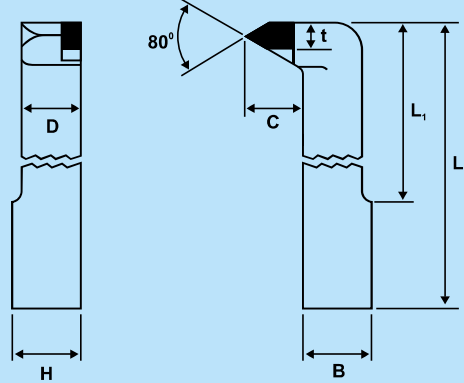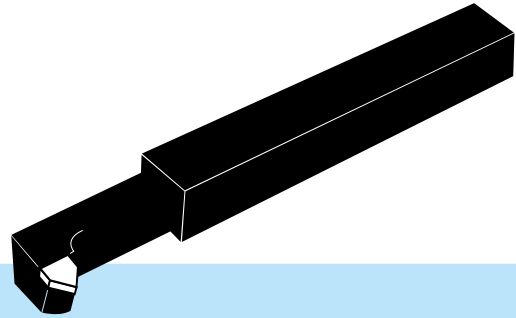

**No.166**





Entering angle Feed Direction	Tool Code	Dimensions in mm									Tip
		H/B	Length	Length <sub>i</sub>	Height <sub>i</sub>	a	d	t	C	ØA min	
<p>Rake angle 0° Angle of inclination 0°</p>	166 RH-11 V	16	140	30	7.8	1.7	10	1.0	---	15	FU12
	166 RH-12 V	20	160	40	9.8	1.7	15	1.0	---	20	FU12
	166 RH-13 V	25	180	50	12.3	2.0	18	1.2	---	25	FU14
	166 RH-14 V	32	200	60	15.7	2.0	21	1.2	---	30	FU14
<p>Rake angle 0° Angle of inclination 0°</p>	166 RH - 1010	10	100	30	----	5.0	9	2.5	12	24	E4
	166 RH - 1212	12	110	35	----	6.0	11	3.0	14	30	E5
	166 RH - 1616	16	140	45	----	7.0	15	3.5	16	36	E6
	166 RH - 2020	20	160	55	----	8.0	18	4.0	18	45	E8
	166 RH - 2525	25	200	65	----	9.0	22	5.0	20	55	E10
	166 RH - 3232	32	250	75	----	10.0	28	6.0	25	70	E12



*Loving me isn't easy*

*I have sharp edges*

**ROLLER GROOVING TOOL**

**MESSCHEART GROOVING TOOL**

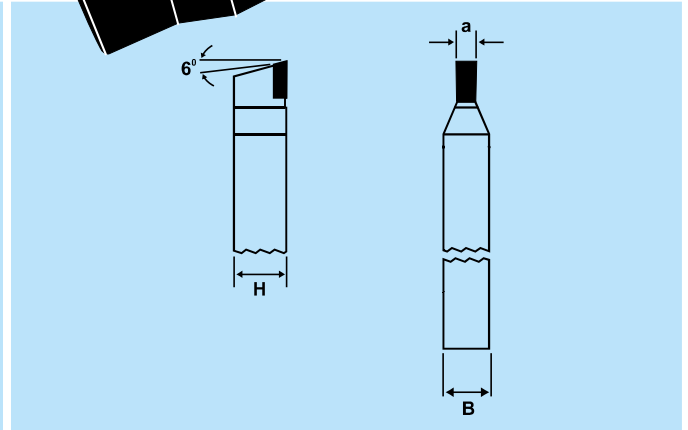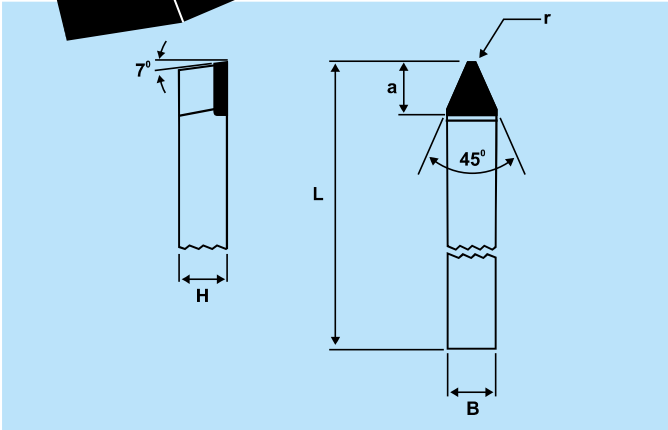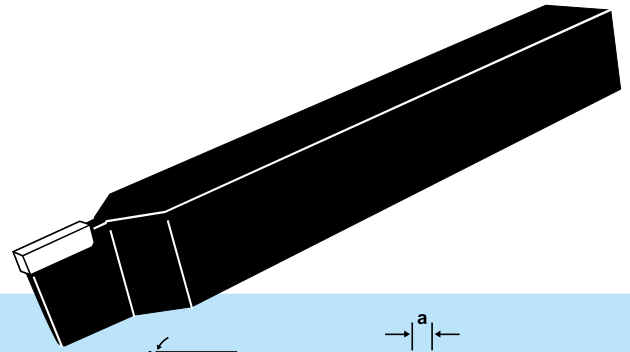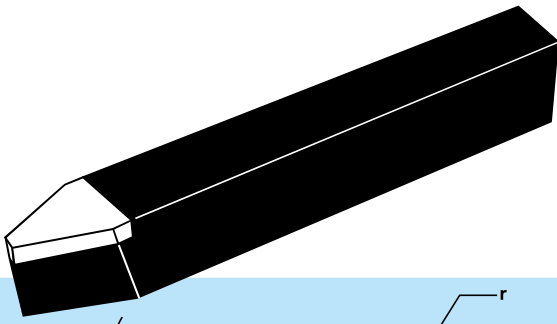

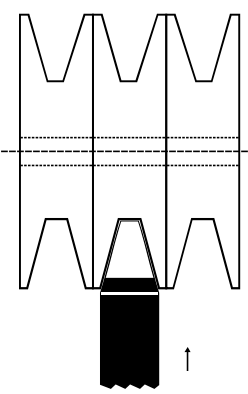Entering angle Feed Direction	Tool Code	Dimensions in mm						Tip Size W x L x T
		Height	Breadth	Length	$\alpha$	a	Radius	
 <p>Rake angle 10° Angle of inclination 0°</p>	RGT 3232	32	32	300	35°	32	0.8	32 x 45 x 8
	RGT 3232	32	32	300	40°	32	0.8	32 x 40 x 8
	RGT 3232	32	32	300	45°	32	0.8	32 x 40 x 8
	RGT 3232	32	32	300	50°	32	0.8	32 x 40 x 8
	RGT 3232	32	32	300	55°	32	0.8	32 x 40 x 8
	RGT 4040	40	40	300	35°	40	0.8	40 x 50 x 8
	RGT 4040	40	40	300	40°	40	0.8	40 x 50 x 8
	RGT 4040	40	40	300	45°	40	0.8	40 x 50 x 8
	RGT 4040	40	40	300	50°	40	0.8	40 x 50 x 8
	RGT 4040	40	40	300	55°	40	0.8	40 x 50 x 8
	RGT 3225	32	25	300	35°	32	0.8	32 x 45 x 8
	RGT 3225	32	25	300	40°	32	0.8	32 x 40 x 8
	RGT 3225	32	25	300	45°	32	0.8	32 x 40 x 8
	RGT 3225	32	25	300	50°	32	0.8	32 x 40 x 8
RGT 3225	32	25	300	55°	32	0.8	32 x 40 x 8	
 <p>Rake angle : 10° Angle of inclination 0°</p>	MGT 3232	32	32	300	----	6	----	6 x 25 x 6
	MGT 3232	32	32	300	----	8	----	8 x 25 x 8
	MGT 3232	32	32	300	----	10	----	10 x 25 x 10
	MGT 4040	40	40	300	----	6	----	6 x 25 x 6
	MGT 4040	40	40	300	----	8	----	8 x 25 x 8
	MGT 4040	40	40	300	----	10	----	10 x 25 x 10

*“Products are made in the factory,  
but brands are created in the mind”*



**ZENSTAR**

[www.zenstarproducts.com](http://www.zenstarproducts.com)  
email [sales@zenstarproducts.com](mailto:sales@zenstarproducts.com)

**TECHNO TOOLS IMPEX**

Quality Tooling Redefined



**ROTOZEN**

[www.rotozenproducts.com](http://www.rotozenproducts.com)  
email : [sales@rotozenproducts.com](mailto:sales@rotozenproducts.com)